

ERA Invincible - Dual Network Comms Kit (E11)



Features

- Dual Network GSM/GPRS, PSTN (landline)
- Selectable alert notification network preferences, i.e. landline and/or SMS text and/or GPRS message
- Remote monitoring: 'Listen-in' with 'Two-Way' talk
- SMS text alerts for: arming/disarming, intruder, tamper, power failure/recovery, RFID Tag identification
- Built-in SIM Card holder (accepts standard size SIM Card)
- Quick disarm at the Control Panel by RFID Contactless Tag
- Nameable Tags for easy identification of 'who disarmed the system and when'
- Built-in siren with adjustable volume and duration
- Arm, Part Arm, Disarm Modes (silent part arming)
- Adjustable Entry/Exit delay
- Sensor/Zone naming – up to 50 Sensors
- Store 5 x Emergency phone numbers and 5 x SMS numbers
- Speed dial to master phone number - hands free calling
- Voice Memo - Record/playback
- 150 Event Log
- Supports up to 10 Remote Controls and 50 Wireless Sensors & 50 RFID Contactless Tags
- Pet Friendly
- All batteries included
- Tamper protection

Key Features

- Remote monitoring and control from anywhere in the world with the free App and by SMS text
- Automatic alerts/notifications include: intrusion, emergency, disarm, power failure/recovery, flood, smoke
- Backlit LCD Screen Control Panel with Touch keypad and RFID reader
- Personalised SMS text notifications, i.e. 'Jack has disarmed the system'
- RFID Contactless Tags can be named for Tag user identification
- Zone naming for easy identification of affected area, i.e. 'zone 1 Alarm: Entrance Door Sensor'
- Pet Friendly
- All batteries included

Search for the free
'ERA Invincible Alarm' App



ERA Invincible - Dual Network Comms Kit (E11)

Ordering Details

| Product | Part No. |
|-------------------------------|----------------|
| ERA Invincible | |
| Alarm kit | ERA-INVINCIBLE |
| Additional Accessories | |
| Pet Friendly PIR Sensor | EPIR |
| Door/Window Sensor | EMAG |
| Remote Control | EREM |
| Wifi HD Camera | IP116 |
| Ceiling Mounted PIR Sensor | P700 |
| Narrow Beam PIR Sensor | P800 |
| Vibration Sensor | WD80 |
| Smoke Detector | SMK500 |
| Water Detector | WI210 |
| RFID Keypad | KP700 |
| RFID Contactless Tag | TAG26 |
| Personal Alert Button | SOS100 |
| Range Extender | RT101 |
| Indoor Plug-in Siren | WS105 |
| Solar Charged Siren | ESS260B |
| Replica Siren | ERS26B |
| Outdoor Mains Powered Siren | WS280 |


Technical Information

| Item | Parameter |
|---|---|
| Model No | E11 |
| Control Panel's Power Supply | Input: AC 110-240V/50-60Hz Output : DC 12V/500mA, 6Wh |
| Standby Current | ≤ 90mA |
| Alarm Current | ≤ 300mA |
| Transmitting Distance | ≤80metres (in open field condition) |
| Internal Battery Backup | 3.7V/800mAh x 2pcs (BL-5B) |
| Battery Standby time | 10 hours |
| Internal Siren | 95dB |
| Allowed amount of expandable wireless accessories | 10 pcs Remote Controls, 50pcs Wireless Accessories, and 50pcs RFID Contactless Tags |
| Maximum Event Logs | 150 Events |
| Radio Frequency | 433MHz |
| Housing Material | ABS Plastic |
| Screen | LCD Screen |
| Operation Condition | Temperature: -10°C - 55°C Humidity: ≤80% (non-condensing) |
| Dimensions (L x W x H) | Panel: 185mm x 130mm x 27mm LCD Screen: 61.70mm x 14.12mm |
| EAN | 5060215565010 |
| Outer Carton Qty | 20 |
| Outer Carton Dimensions | 460mm x 415mm x 315mm |
| Outer Carton Weight | 18.6Kgs |

Packaging

Kit Content
Includes: Control Panel (with back-up battery and internal siren), Adapter x 1, Pet Friendly PIR Motion Sensor x 1, Door/Window Sensor x 1, Remote Control x 2, RFID Contactless Tags x 2, all Batteries, all Fittings, Instruction Manual.

Suggested Installation Layout

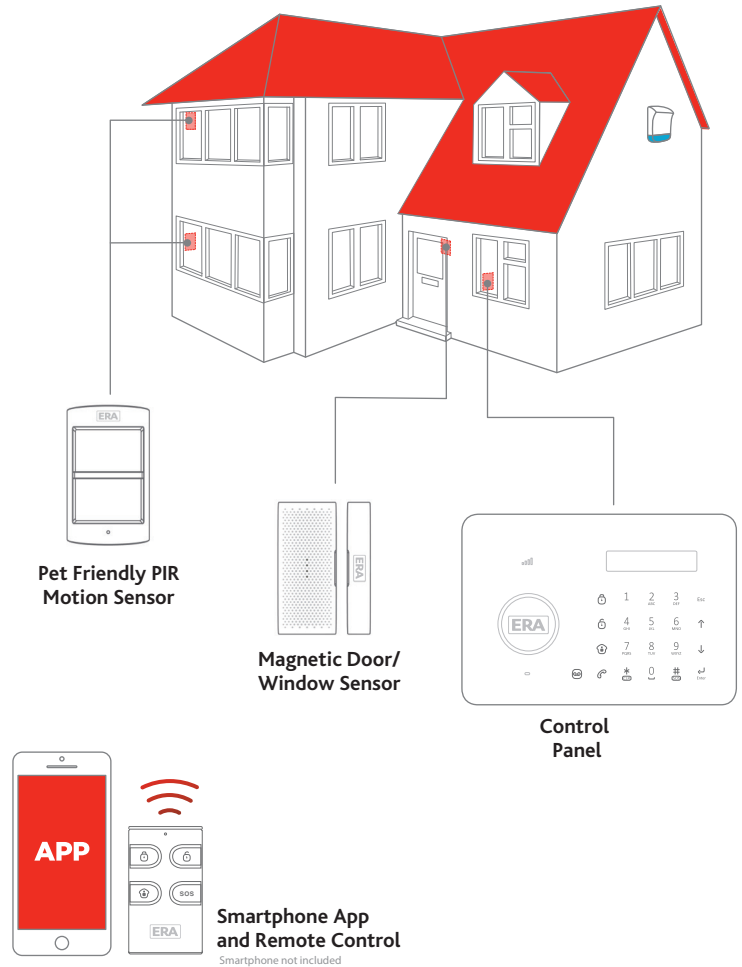

Pet Friendly PIR Motion Sensor

Magnetic Door/Window Sensor

Control Panel

Smartphone App and Remote Control
Smartphone not included

ERA reserves the right to change specification without notice. It is the responsibility of the householder or installer to ensure that the finished product meets any required safety and performance specification.